

INSTALLATION INSTRUCTIONS FOR UL PHASE DIMMABLE CLASS 2 COMPACT LED DRIVERS


Quick Specs

Input Voltage	120VAC
Output Voltage	12/24VDC (Check Label)
Ambient Temp	-30°C - + 40°C / -86°F - + 104°F
Environment	IP65

WARNING

Before You Begin


To avoid fire, shock, or death, turn the power off at the circuit breaker and test to ensure the power is off before wiring.



Mount the Driver:


Select a suitable location, which can provide adequate support for the weight of the driver.

NOTE: Install the LED Driver in a well-ventilated area free from explosive gases and vapors.

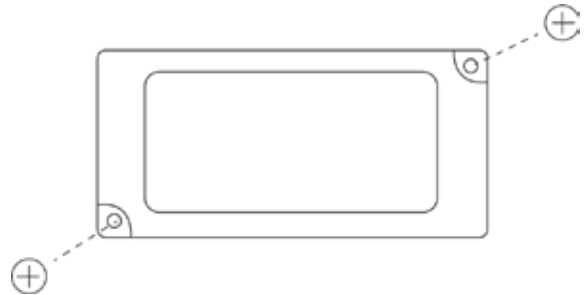

Wire Connections

With the power switched off, connect the wires according to the wiring diagram below.

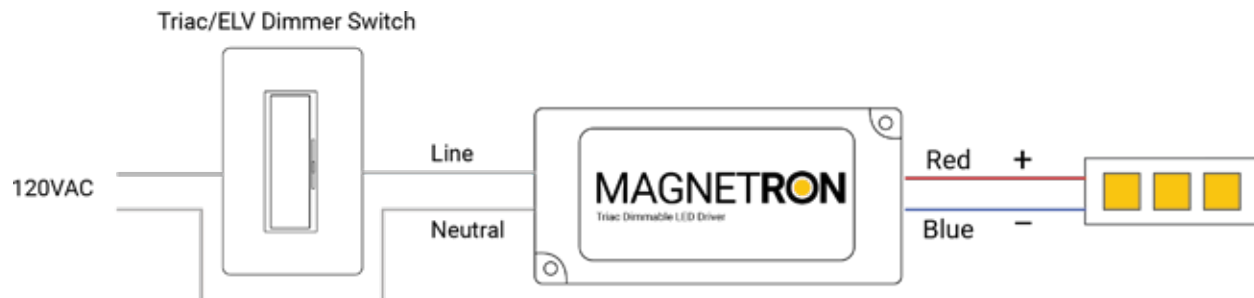

FOR USE WITH:

ENO-12V-3.3A-CDHW
ENO-12V-5A-CDHW
ENO-24V-2.5A-CDHW
ENO-24V-4A-CDHW

