INSTALLATION INSTRUCTIONS
PDC-NL-220

RATING: AC 120V, 60Hz, 12A
OUTPUT: Two 120V AC power outlets, one DC 5V 4.2A USB charger w/2 charging ports

CAUTION:
To prevent the risk of fire electric shock, please be sure to read all instructions before installing or using this unit.

WARNING:
To reduce the risk of fire, electric shock or injury to persons:

1. For indoor and dry location use only.
2. Do not use with extension cords.
3. Do not install this device if there is not at least 10 meters (30 feet) or more of wire between the electrical outlet and the electrical service panel.
4. Do not plug a device or devices into receptacles that exceed a total of 12A.
5. Do not open or attempt to open the unit for any reason.

MOUNTING:

1. Cut a 6.42" x 4.02" (163mm x 102mm) hole through the mounting surface.
2. Remove the adhesive tape and protection inserts from the sides of the unit.
3. Set the unit into the hole.
4. Place the mounting brackets through the included thumb screws. Tighten the screws by hand or use a 4mm hex wrench to secure the unit to the desktop. Do not over-tighten the screws.
5. Plug the power cord into the nearest wall outlet. Make sure that the wall outlet is properly grounded.

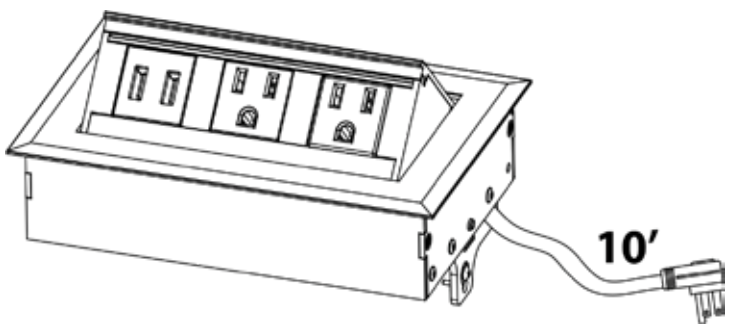

Please contact Outwater at 1.800.631.8375 for assistance.

24 River Road • Bogota, NJ 07603 | Phone: 1.800.631.8375 | Fax: 1.800.888.3315 | www.outwater.com

Outwater Industries, Inc. assumes no liability for improper installation.